

**FITNESS**eco

**PaviFLEX**  
GYM FLOORING



[www.paviflex.es](http://www.paviflex.es)






# FITNESS<sup>eco</sup>

**PaviFLEX**  
GYM FLOORING

PaviFLEX Fitness<sup>eco</sup> un pavimento excepcional al mejor precio, para áreas fitness en general, cardio y ciclo indoor.  
PaviFLEX Fitness<sup>eco</sup> an exceptional pavement at the best price, for fitness areas in general, cardio and indoor cycle.

## COLORES / COLOURS

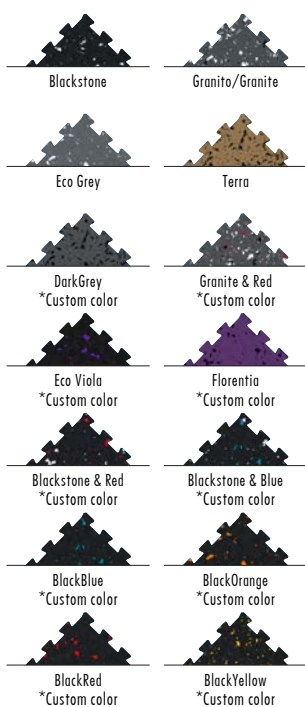

## ESPECIFICACIONES TÉCNICAS / TECHNICAL SPECIFICATIONS


MATERIAL: Goma 100% virgen / Virgin Rubber
INSTALACIÓN / INSTALLATION: Puzzle sin encolar / Interlocking no glue
ACABADO / FINISH: 4 lados puzzle / 4 side puzzle tiles
GROSOR / THICKNESS: 5 mm
SUPERFICIE LOSA / SIZE SHEET: 100x100 cm
PESO / WEIGHT: 7 kg/m <sup>2</sup>
TRATAMIENTO SUPERFICIE: Impermeable y anti bacteriana
SURFACE TREATMENT: Waterproof & Non Bacteria
DENSIDAD / DENSITY: UNE 53526 1350 kg/m <sup>3</sup>
DUREZA / HARDNESS: UNE 53130 DUREZA/ShoreA 70 ±5
RES. ABRASIÓN / ABRASSION RES: UNE 53527 <380 mm <sup>3</sup>
COEFICIENTE DE FRICCIÓN: EN 13036-4: ÓPTIMO (75-110)
SLIP RESISTANCE: EN 13036-4: OPTIMUM (75-110)
RES. AL IMPACTO / RES. TO IMPACT: EN 1517 <0,5 mm
COMPRESIÓN / COMPRESSION SET: UNES3511 (30 min) 23%
COMPRESIÓN / COMPRESSION SET: UNES3510 (24 h) 13%
RESISTENCIA AL FUEGO / FIRE REACTION: ES 13501-1 Cfl-s2
ABSORCIÓN AGUA / WATER ABSORP: ASTM D570 0%
DILATACIÓN / DILATATION: 0-40°C : 1,5 · 10 <sup>-4</sup> °C <sup>-1</sup>
PAH: Norm AfPS GS 2014:01 PAK... PASS
AISLAMIENTO ACÚSTICO / ACOUSTIC ISOLATION: ISO 10140: >15,5 dB

Fitness<sup>eco</sup> es nuestra aportación más respetuosa con el Medio Ambiente. Fabricado con el material sobrante de nuestro pavimento premium, es el pavimento más ecológico que producimos, ya que a partir de él obtenemos un suelo compacto de excelentes propiedades al mejor precio.

Su superficie es impermeable y evita filtraciones de agua y sudor, evitando así malos olores y conservando la vida útil del pavimento.

This is PaviFLEX respectful contribution with the environment. Fitness<sup>eco</sup> is produced using the scraps of our Fitness flooring production, we recycle and produce again, so we obtain an Eco product with the same properties as our Premium product, but less expensive.

The Fitness<sup>eco</sup> surface is water proof, as it is made of compact virgin rubber that do not allow the water or the sweat to penetrate, therefore the product do not smell and it will keep the same appearance much longer than others.



## DESCRIPCIÓN TÉCNICA / TECHNICAL DESCRIPTION

DESCRIPCIÓN Description	ESPESOR Thickness	DIMENSIONES Size
A Losa / Tile	5 mm	100x100 cm
B Perfil / Edge	5 mm	100x12 cm
C Esquina / Corner	5 mm	12x12 cm

\*Custom: Negro + color personalizable / Black with specific colour you wish.  
Consulta para colores personalizados / Ask for custom colours.  
Ver listado completo en la web / Full Color Swatch on web.

